




RATINGS AND CHARACTERISTICS CURVES


7 \$ f & X Q O H V Q R W K B U Z L V H

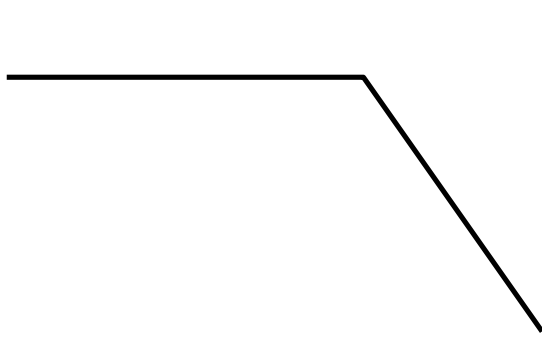


250  
200  
150  
100  
50  
0  
1 100

7 F & D V H 7 & I P S  
Current Derating, Case

Maximum Repetitive Surge Current

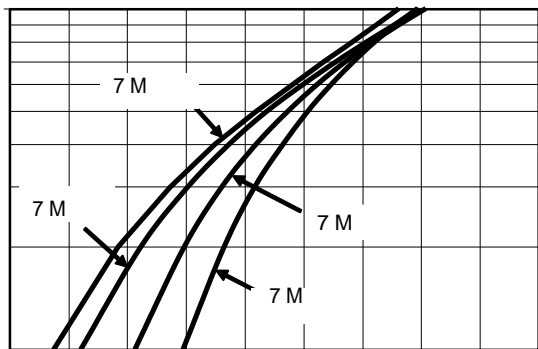


d C % ] o : μ v š ] } v % ] š v

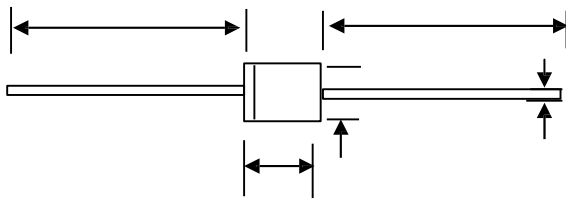**PACKAGE OUTLINE DIMENSIONS****DO-201AD**

## DO-201AD mechanical data

UNIT		A	B		D
mm	max	26.5	9.5	4	5.3
	min	24.5	7.3	1	4.8
mil	max	1043.30	374.01		208.67
	min	946.57	287.40		188.97

### Marking Information

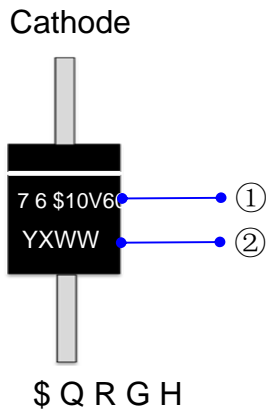

① Product model : TSA10V60

② PDC information

③ Y X WW

WW:Week code(01 to 53)


X:Internal identification code

Y:Year code(ex:0=2020)

### Packaging Information

1. Inside Box

2. Outside Box

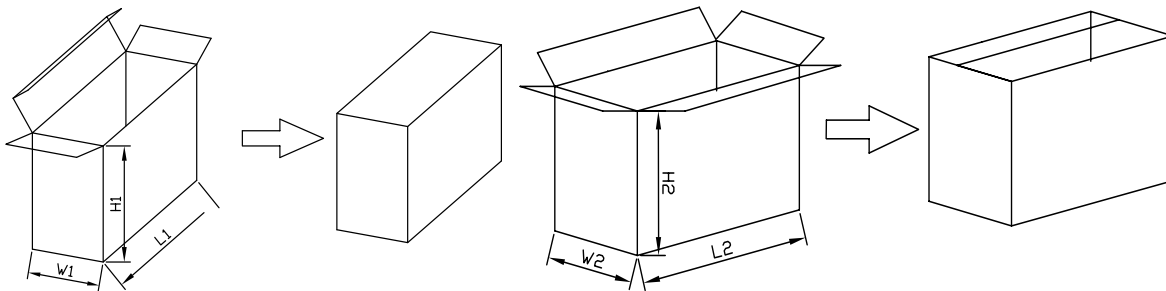

### Packaging Information

NO	UNIT	Inside Box			Outside Box		
		L1	W1	H1	L2	W2	H2
Size	mm	255	75	1		210	320
QTY	PCS	Smallest package,1000PCS/carton			10,000PCS/carton,10 boxes in total		
Note	Tolerance	20mm,±3mm;		21-100mm,±5mm;	101-500mm,±10mm		