


Features

DO-201AD

TSA

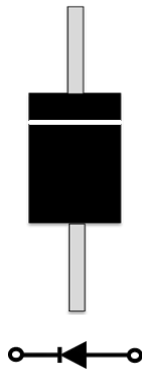

Applications





Maximum ratings and electrical characteristics (TJ = 25°C unless otherwise noted)

		()		
		-		
		,	-5 +	
	-			
		()		
		()		

() , %


() 0

RATINGS AND CHARACTERISTICS CURVES ()

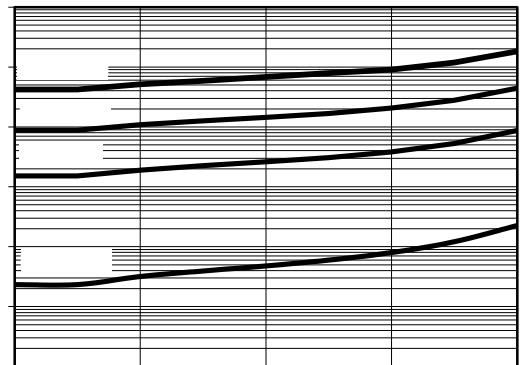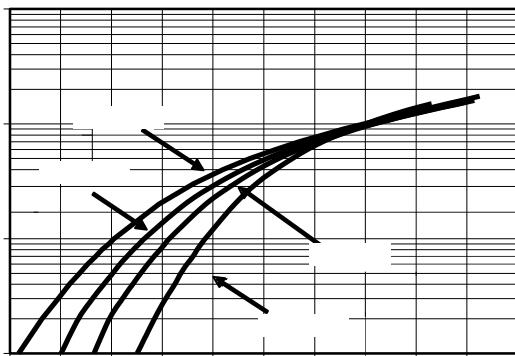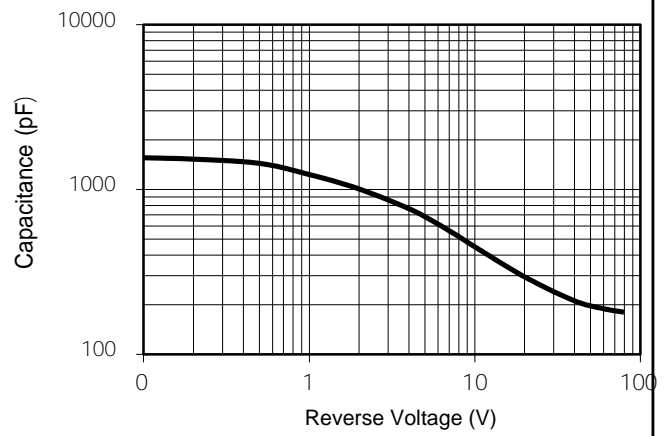
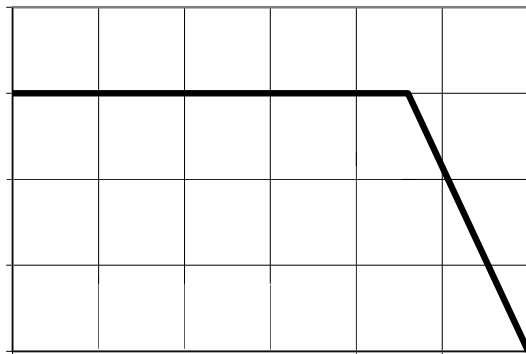


PACKAGE OUTLINE DIMENSIONS

DO-201AD

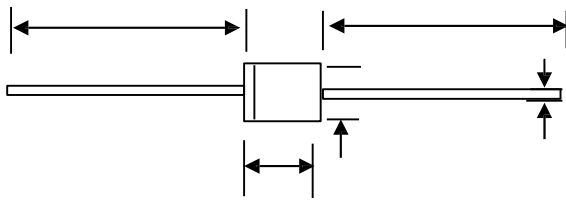

				C	
				1.4	
				1.1	
				5	







()

()

DWU] b[' =bZcf aUh] cb

% =bg] XY 6cl

&' G hg] XY 6cl



DWU] b[' =bZcf aUh] cb

BC	I B=H	% =bg] XY 6cl			G hg] XY 6cl		
G] nY	aa	@%	K%	<%	@&	K&	<&
		&)	+))	%4	4		